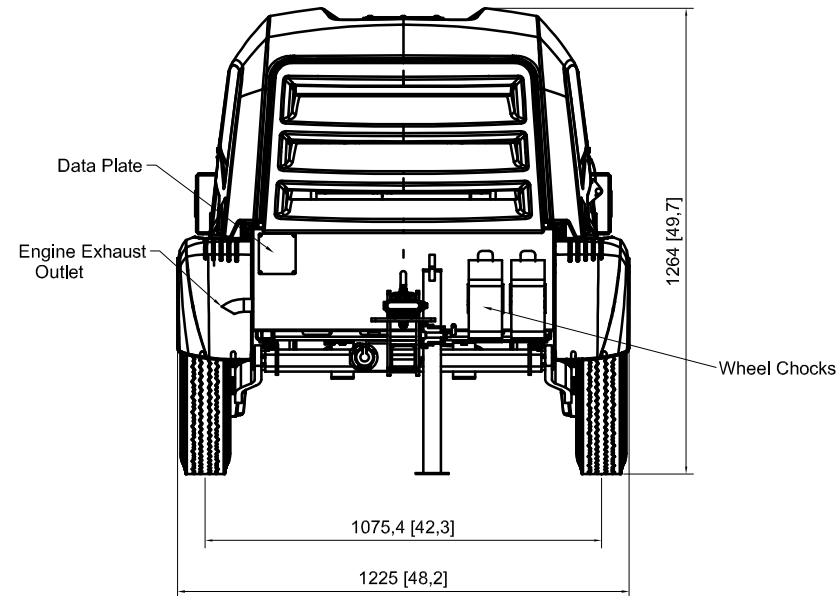
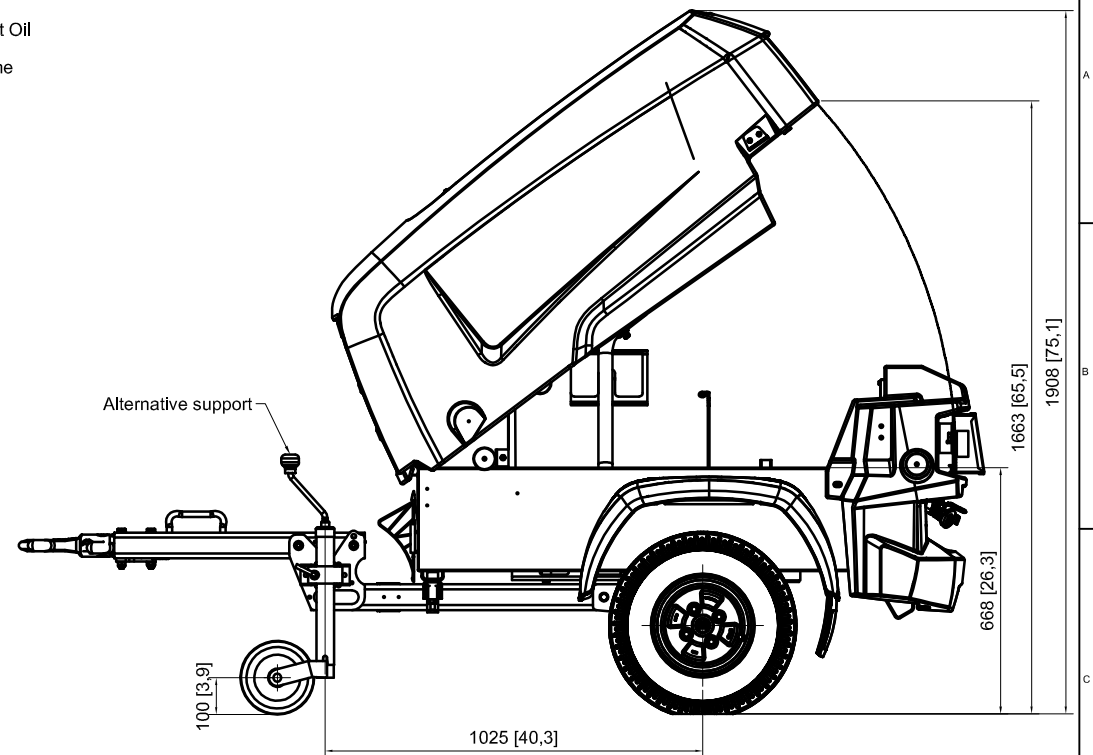
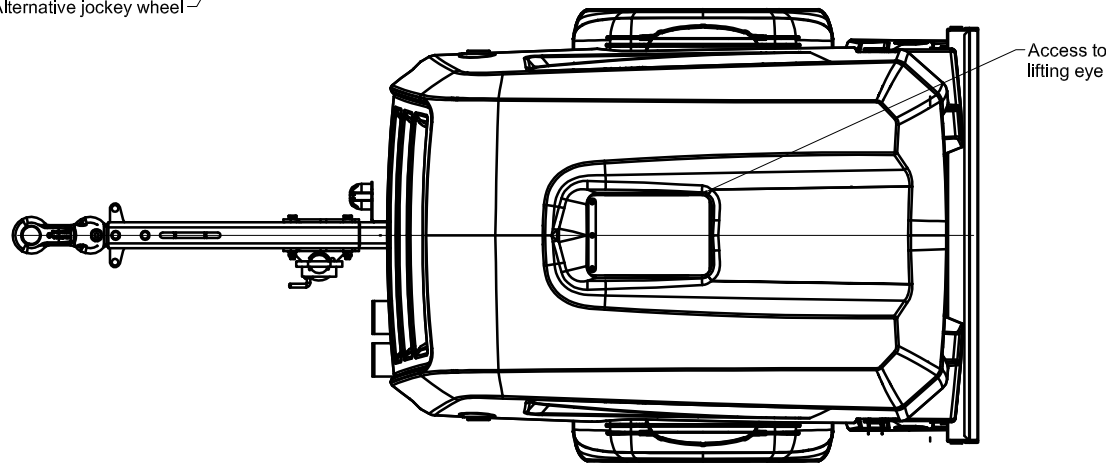
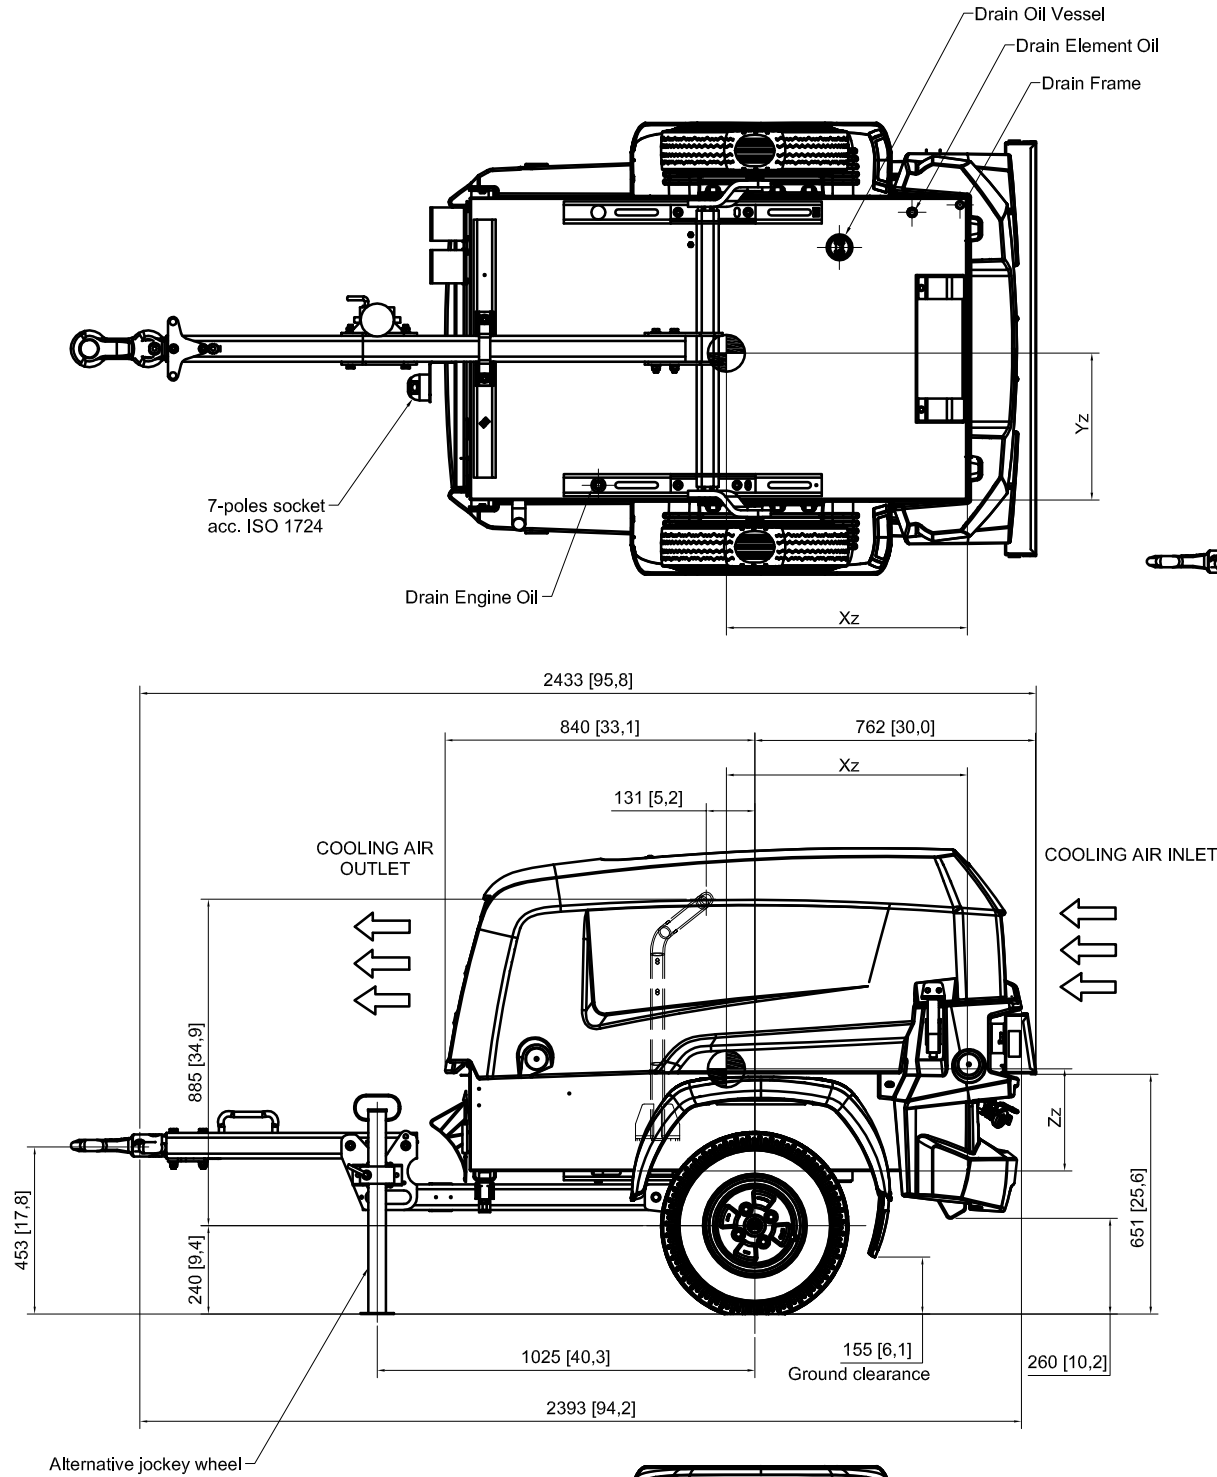
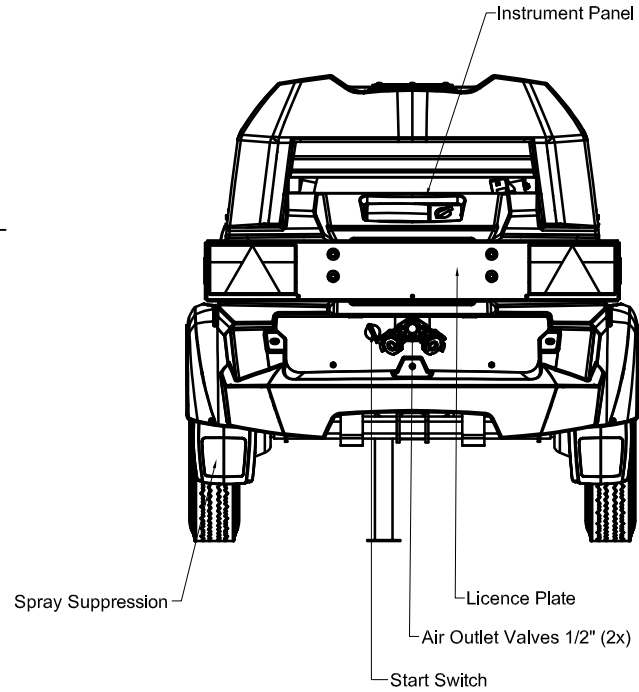


CONFIDENTIAL: This document contains information that is confidential to the company. It is not to be distributed outside the company without the express written permission of the company.

Note	Position	Modified from	Date	Wtr./Appr.









Type	06427
Commercial Name	XAS 110 T4F
Total Max. Weight	600
Max. Load on Axle	50
Max. Permissible Axle Load	600

Table							
Net Mass	Xz	Yz	Zz	Wet Mass	Xz	Yz	Zz
Kg/Lbs	mm / [Inches]	mm / [Inches]	mm / [Inches]	Kg/Lbs	mm / [Inches]	mm / [Inches]	mm / [Inches]
533/1172,6	667/[26,2]	412/[16,2]	282/[11,8]	569/1251,8	654/[25,7]	398/[15,6]	277/[10,9]

NOTE :
- Dimensions in bracket [] are in Inches.
- Wet Mass = with oil, water, fuel and dry batteries.

References if not indicated according to:				General tolerances			
ATLAS COPCO STANDARD/Klasse/Class				1350K - m			
Name				DIMENS. DRWG XAS 110 T4F (DOT Approved)			
Material				NOT APPLICABLE			
Treatment				Not Applicable			
Scale				1:10			
Drawn by				Ineraka			
Version/Dwg				00/00			
Blank wt.				0			
Kg				Ft/Lb wt.			
0				0			
Designation				Sheet () 02 01			
Parent 3D Model				Ed. Version 3D			
Preliminary				2016-05-27			
9822 0120 00				9822 0120 00			

Ball coupling type: ZKB 1,7-1 approval nr: E4-55R-010132 class: B50-X	D: 15,8 KN S: 170 Kg U: N.A. V: N.A.		Towing eye BNA type: Zugöse 68 approval nr: E1-55R-012355 class: S	D: 30,95 KN S: 150 Kg U: N.A. V: N.A.	
Towing eye A.C. type: Zugöse 77,0-02 approval nr: E1-55R-012352 class: S	D: 18,47 KN S: 100 Kg U: N.A. V: N.A.		Towing eye ITA type: Zugöse 45,0-05 approval nr: E1-55R-012351 class: S	D: 18,46 KN S: 100 Kg U: N.A. V: N.A.	
Towing eye NATO type: Zugöse 76 approval nr: E1-55R-012170 class: S	D: 26,9 KN S: 300 Kg U: N.A. V: N.A.		Towing eye GB type: Zugöse 50,8-03 approval nr: E1-55R-012350 class: S	D: 18,47 KN S: 100 Kg U: N.A. V: N.A.	
Towing eye DIN type: Zugöse 40 approval nr: E1-55R-012169 class: S	D: 26,9 KN S: 300 Kg U: N.A. V: N.A.				

Tyres - paragraph 6.6.1		Rolling radius(mm)-par 6.6.2	Pressure (Kpa)-par 6.6.3
1	155/80R13 TL 79 T	281	250
2	155R13C 85/83 N	279	350
3	155R13 TL 80 N	281	282
4	165R13C 96/94 N	288	443
5	165R13C 94/92 N	288	450
6	165R13C 94 Q	288	380
7	5.00-10 4PR 72 N	250	276

CONFIDENTIAL:

[illegible]

All materials supplied are in compliance with the requirements of the List of Prohibited Substances

Information if not indicated according to:																																																																																									
ATLAS COPCO STANDARD/Klasse/Class																																																																																									
Name										DIMENS, DRWG										XAS 110 T4F (DOT Approved)										Confidentiality Class Doc. to T102K										G																																																	
Material										NOT APPLICABLE																				2																																																											
Treatment										Not Applicable																				ACD																																																											
										Scale: 1:5										Family										A1										Compare										Drawing owner																																							
Drawn by										ineraka										Blank n°:																				Replices										AIP																																							
Version Dwg 00.00										Blank st.: 0										Kg										Fini st.: 0										Kg										Designation										Sheet ()										03										01									
STATUS										Des checked:										Proof checked:										Approved:										Date										2016-05-27										6822 0120 00																													
Preliminary																																																																																									