




CALIFORNIA AIR TOOLS 20040DC Powerful 4.0 Hp Ultra Quiet & Oil-Free Air Compressor with 80% Air Drying System

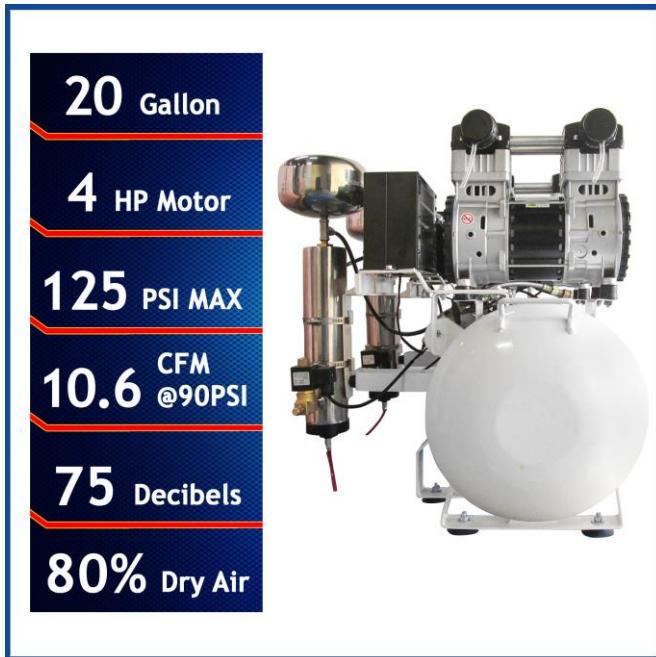


4.0 HP
(Rated/Running)
20 Gallon Steel Tank
80% Air Drying System
12.80 CFM @ 40
PSI
10.60 CFM @ 90 PSI
220 Volts / 60 Hertz
/ Single Phase

The CALIFORNIA AIR TOOLS 20040DC Ultra Quiet & Oil-Free Air Compressor with Air Drying System is designed to be one of the quietest 4.0 Hp air compressors in the industry having only 75 decibels of sound.





The Powerful Twin 2.0 HP (SP-9421-22060) motors operate at only 1680 RPM creating less noise and less wear.

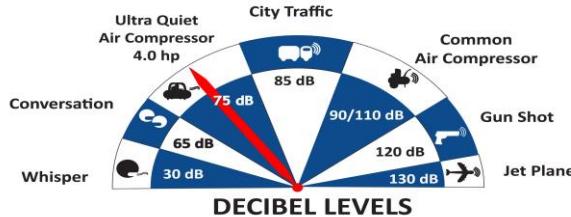

ULTRA QUIET

ONLY 75 DB NOISE LEVEL

The Oil-Free Dual Piston Pump System is engineered for high performance and durability.

The CAT-20040DC Air Compressor has a Oil-Free Dual Piston pump designed to have a life cycle before wear of 3000 Plus hours.

The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).


The large 20 Gallon Steel Air Tank is just the right size for a shop or garage.

80% AIR DRYER SYSTEM

The 80% Air Dryer is specially designed to remove water vapor from the air to protect sensitive tools and machinery.

To dry the air from the air compressor an Aftercooler and 80% Air Dryer are utilized.

The aftercooler is a heat exchanger for cooling the discharge air from the air compressor. The water vapor from the compressed air is condensed into liquid form and pushed into the Air Dryer.

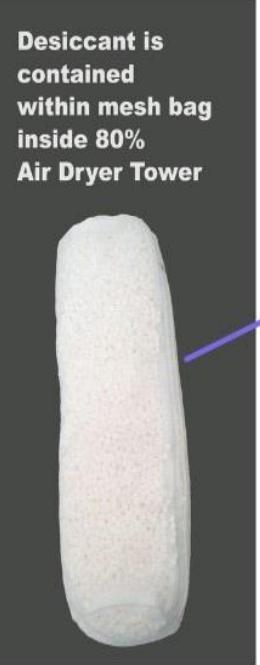




Ultra-Quiet Motor/Pump - Only 75 Decibels

Long Life Oil-Free Dual Piston Pump

Teflon Cylinder Rings

Stainless Reed Valves

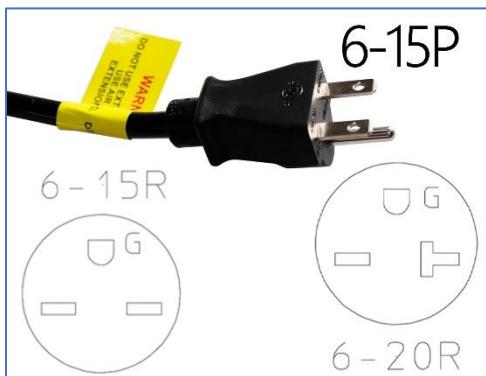



FEATURES

- * **Ultra Quiet** - Only 75 decibels
- * Oil-Free Pump - Cleaner air for better tool operation.
Less maintenance and Costs.
- * Two pressure control gauges
- * One - Female industrial "Push to Connect" quick connector
- * Condor Pressure Switch
- * Thermal Overload Protector
- * 125 PSI Maximum Pressure
- * 220 Volts / 60 Hertz / Single Phase - (No 208 Volts - if necessary, obtain 208 to 220 voltage booster)
- * Low Amp Draw - 14 Amps
- * Time to fill tank from empty to full - 150 Seconds
- * Recovery time from 95 PSI to 125 PSI - 40 Seconds
- * Duty Cycle - 70/30*
- * Less heat which dissipates more efficiently.
- * 20 Gal. Steel Air Tank
- * L (39") x W (25") x H (28")
- * 175 lbs
- * Air Dryer - Includes Activated Alumina desiccant with a 4000-hour life.
Activated Alumina is used in air prepurification (due to its high water and carbon dioxide adsorption capacity) and adsorption of sulphur compounds.
- * Aftercooler (condenser)
- * 1 Year Limited Warranty
- * Comes complete (4) Air Filters
- * Plug Type: Nema 6-15P (fits Nema 6-15R or 6-20R receptacle)
- * Commercial Use: Refer to State & City Codes
- * Non-ASME Air Tank
- * Assembled in USA with global components

For more information and to watch a 20040DC product demonstration please visit California Air Tools:
<https://www.californiaairtools.com/air-dryer-ultra-quiet-oil-free-air-compressors/cat-20040dc/>

Manufactured in Mexico using global components.

MODEL: 20040DC

PART NUMBER: CAT-20040DC

www.californiaairtools.com

Revision A: 07-2024