

# WEDA D40 (60 Hz)

## Product reference sheet

The WEDA drainage pumps handle either clean or sand-laden water, even with small solid particles, with the best performance and efficiency and with the highest power to weight ratio. These pumps are particularly suitable for general dewatering applications, ground water, raw water, construction sites and harsh conditions on site.


Product code	WEDA D40
Installation	Portable drainage pump
Hydraulic range	N - normal head
Insulation class	F (+155°C/+311°F) IEC 85
Protection class	IP68
Voltage variation	Max ± 5% of nominal voltage
Voltage imbalance	Max 2% - between phases
Max start-stop	Max 30 starts/hour
Cable	H07RN-F (20 m) or SOOW AWG (65 ft)
Casted parts	Corrosion resistant aluminum
Impeller	High chrome iron, 55±5 HRC
Wear parts	Rubber (NBR)
Strainer	Hard sole - reinforced polyethylene
Shaft	Stainless steel
O-rings	Rubber (NBR)
Main bearing	Single row ball bearing in oil
Mechanical seal	Primary: SiC/SiC Secondary: lip seal on wear sleeve
Built-in controls and protection	contactor + control relay
Thermal contacts	140°C / 284°F
Options / accessories	Float switch Zinc anodes Epoxy coating Low suction collar Quick couplings (hose / NPT / ISO-G / Camlock / Storz) Pump raft Terminal board NSSHÖU screened cable Slim adapter

Product code	WEDA D40
Solids handling, strainer hole	0.28 in (7 mm)
Liquid temperature	Max 104°F (40°C)
Depth of immersion	Max 65 ft (20 m)
Max liquid specific gravity	1.1
pH of the pumped liquid	pH 5–8


Weight and dimensions	N - Normal head
Discharge connection	3 in
Height	20.7 in (525 mm)
Width	11.4 in (290 mm)
Diameter	8.7 in (220 mm)
Weight (excl. cable)	56 lb (25 kg)



### Performance curve

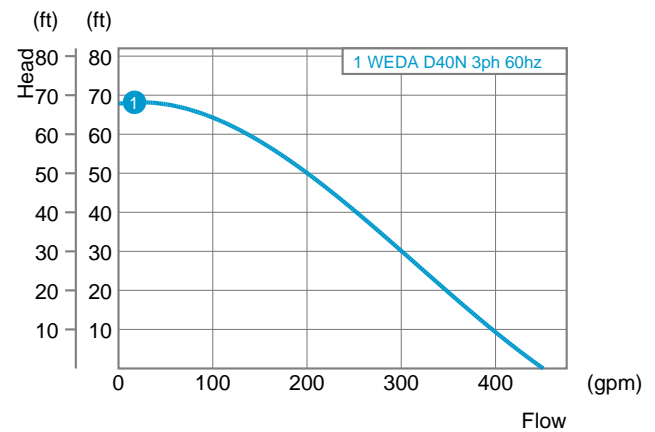

### Power rating

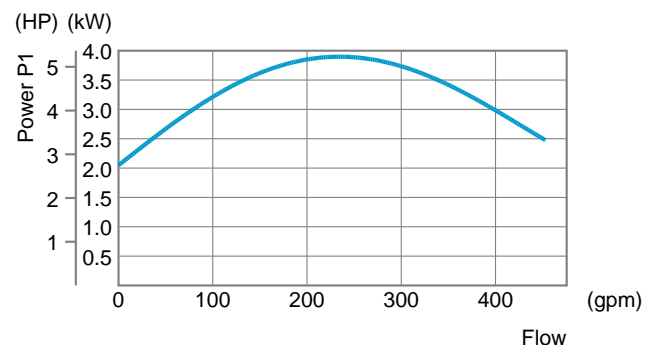

Rating	3 ph	Std cable
Power P <sub>1</sub>	4.1 kW	
Power P <sub>2</sub>	4.3 HP	
Shaft speed	3500 r.p.m.	
230 V	12.0 A	AWG16/14
460 V	6.0 A	AWG16/14
575 V	4.8 A	AWG16/14


Other voltages on request

# WEDA D40

## Performance sheet



### Performance curve

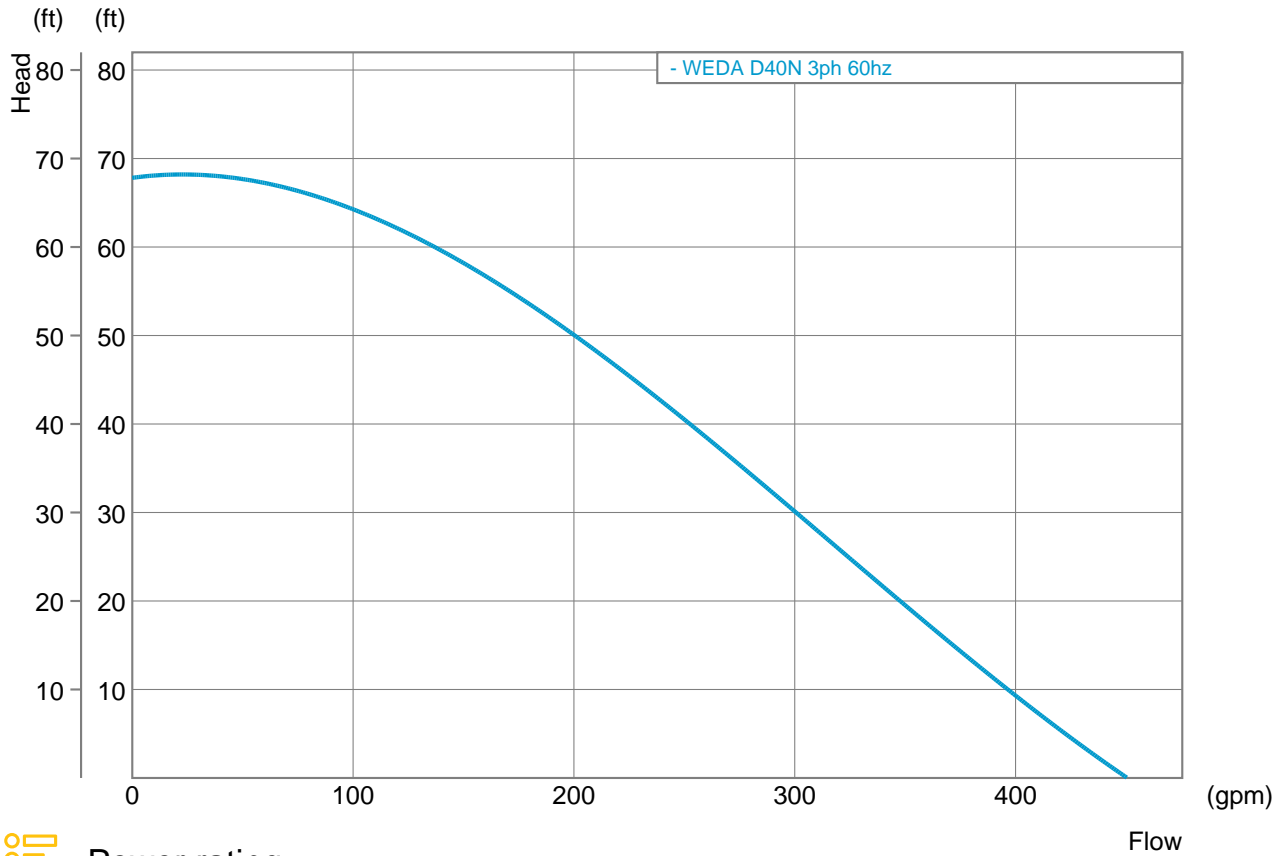

### Power rating

